


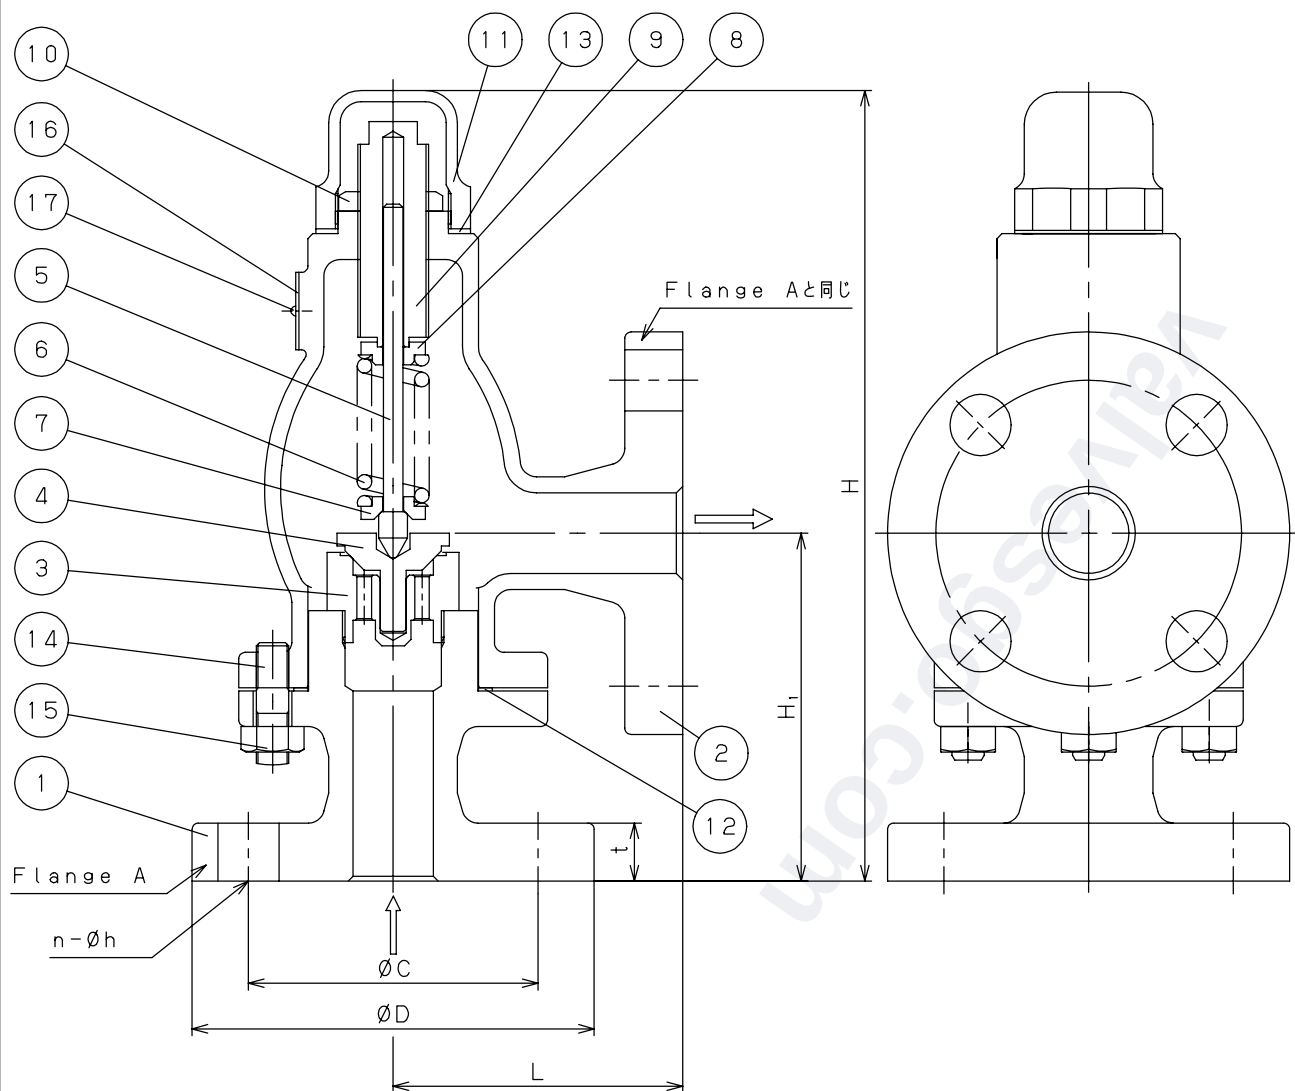

17	Rivet	Carbon Steel	打込みねじ	S15C	2
16	Name Plate	Stainless Steel	銘板	SUS304	1
15	Nut	Rolled Steel	ナット	SS400	1set
14	Stud Bolt	Rolled Steel	植込みボルト	SS400	1set
13	Gasket	Non-Asbestos	ガスケット	Non-Asbestos	1
12	Gasket	Non-Asbestos	ガスケット	Non-Asbestos	1
11	Cap	Cast Iron	キャップ	FC200	1
10	Lock Nut	Brass	ロックナット	C3604	1
9	Adjusting Screw	Brass	調節ねじ	C3604	1
8	Spring Plate	Brass	上部ばね受け	C3604	1
7	Spring Plate	Brass	下部ばね受け	C3604	1
6	Spring	Stainless Steel	ばね	SUS304	1
5	Spindle	Brass	弁棒	C3604	1
4	Valve	Stainless Steel	弁体	SUS304	1
3	Valve Seat	Stainless Steel	弁座	SUS304	1
2	Spring Case	Ductile Cast Iron	ばね箱	FCD450	1
1	Body	Ductile Cast Iron	弁箱	FCD450	1
Nº	Name of Parts	Material	部 品 名	材 質	Q.TY

呼び径 Size	L	H	H ₁	JIS 10K FF フランジ				Weight(kg)
				D	C	t	n-h	
15A	90	245	108	95	70	18	4-15	4.7
20A	90	245	108	100	75	18	4-15	5.0
25A	90	245	108	125	90	18	4-19	6.2
32A	91	285	115	135	100	20	4-19	8.6
40A	91	285	115	140	105	20	4-19	8.8
50A	105	331	132	155	120	20	4-19	13.0

Specification	
Fluid	
Set Press.	MPa
Temp.	°C
Flow Rate	

TYPE AL-280 RELIEF VALVE リリース弁

Approval	T. Nishiyama
Check	T. Nagasaka
Drawing	H. Iwamoto
Drawing No.	Y-1048-2205
Date	20 DEC. 2006

Yoshitake
INC.
<http://www.yoshitake.co.jp>