

BLV-2SF

■ Features


1. Body of BLV-2SF is made of stainless steel.
2. Full bore type ball valve.
3. Anti-static design prevents static electricity charging on the valve.
4. The collar on the lower end of the stem prevents the stem from popping out due to the internal pressure even if the gland is removed.

■ Specifications

Model	BLV-2SF
Nominal size	15 - 100A
Application fluid	Steam, air, water, oil and other non-dangerous fluids
Connection	JIS 10K RF flanged ASME Class 150 flanged EN PN16 flanged
Maximum pressure	According to
Maximum temperature	the pressure-temperature rating
Valve material	Stainless steel
Seat material	PTFE



■ Pressure and Temperature Rating

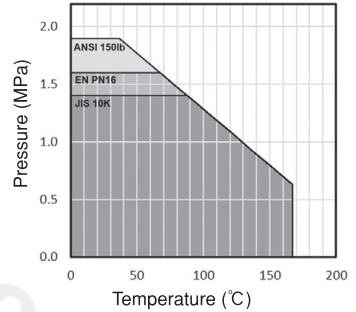

■ Dimensions (mm) and Weight (kg)

Nominal size	L		H	K	Weight		
	JIS 10K ANSI 150lb	EN PN16			JIS 10K	ANSI 150lb	EN PN16
15A	108	130	73	145	1.9	1.6	2.1
20A	117	150	79	145	2.3	1.9	2.8
25A	127	160	91	165	3.8	2.8	4.3
32A	140	180.3	94	165	4.8	3.7	5.8
40A	165	200	113	230	6.5	5.9	7.5
50A	178	230	122	230	8.6	8.5	10.2
65A	190	290	144	230	12.7	12.6	15
80A	203	310	151	320	17.8	18.1	20.7
100A	229	350	165	320	24	28.2	28.5

