

GAS TRAP

CONTRIBUTION TO A HYDROGEN SOCIETY

Self-operated drain valve for gas lines, automatically discharging condensate without external power.




YOSHITAKE


■ Specifications

Model		LD-51	
Nominal size		15A	
Application		Air, Other non-dangerous gas, *Hydrogen gas *Contact for details.	
Working pressure		0-100kPa	
Working temperature		5-80°C	
Material	Body	Stainless steel	
	Valve/Valve seat	FKM/Stainless steel	
	Float	PP&FKM	
Inlet connection	Outlet connection	JIS R1/2	Hose joint type (φ6)

■ Maximum continuous discharge capacity chart

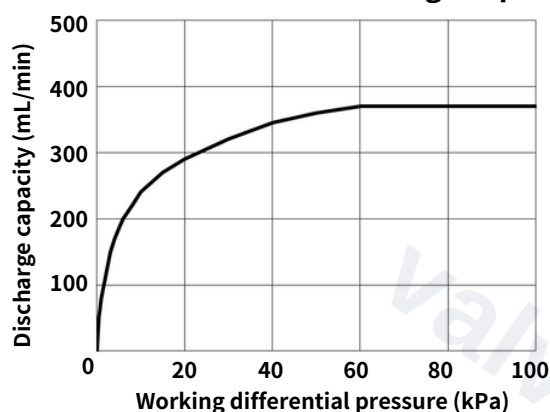


■ Dimensions(mm)

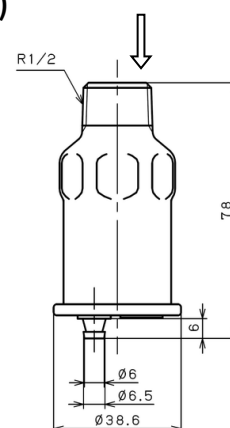

■ Specifications

Model		LD-16	
Nominal size		15A-25A	
Application		Air, Other non-dangerous gas, *Hydrogen gas *Contact for details.	
Working pressure		0-1.0MPa	
Working temperature		5-90°C	
Material	Body	Cast stainless steel	
	Valve/Valve seat	FKM/Stainless steel	
	Float	Stainless steel	
Inlet connection	Outlet connection	JIS R	JIS Rc1/4

■ Maximum continuous discharge capacity chart

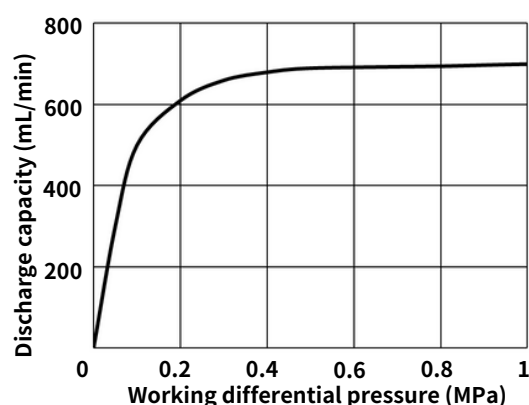

■ Dimensions(mm)

Nominal size	d	H
15A	R 1/2	118
20A	R 3/4	120
25A	R 1	124.5

