

# MS-1, MS-3

## ■ Features

1. Noise can be reduced by attaching to the end of the piping.
2. Trouble-free simple structure.
3. Made of corrosion-free stainless steel (MS-3-13).




## ■ Specification


Model	MS-1	MS-3-13
Application	Steam	
Working pressure	0.05-0.7 MPa	
Max. temperature	60°C	
Material	Bronze	Cast stainless steel
Connection	JIS Rc screwed	

## ■ Dimensions (mm) and Weights (kg)

Nominal size	d	L	L <sub>1</sub>	L <sub>2</sub>	H <sub>1</sub>	Weight
15A	Rc 1/2	100	50	50	25	0.4
20A	Rc 3/4	110	55	55	30	0.4
25A	Rc 1	140	70	70	35	0.8
32A	Rc 1-1/4	180	90	90	45	1.0
40A	Rc 1-1/2	200	100	100	50	2.0
50A	Rc 2	270	130	140	65	4.0

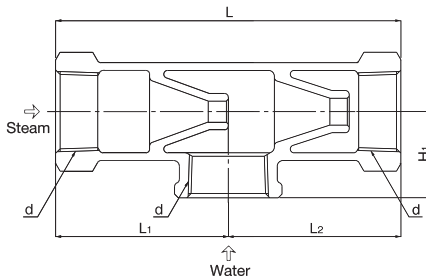

## ■ Nominal Size Selection Chart

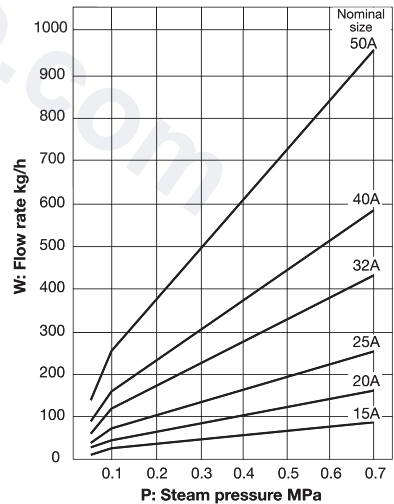

\* Flow rate above is for reference only.