


# SY-17,37

Y type	Basket	Duplex	Temporary
Stainless steel	Nylon	Carbon steel	Easy plug
Pipe end core	One-touch	With fine mesh	Davit



## ■Features

1. Cast stainless steel body is rust-less, available for a wide variety of applications such as food, chemical industries, and oil.
2. High-flow-rate marine type with the largest possible filtration area in view of decrease in flow rate caused by clogging.

## ■Specifications

Model		SY-17	SY-37 (strainer with fine mesh)
Application		Steam, Air, Cold and hot water, Oil, Other non-dangerous fluids	
Maximum pressure		2.0 MPa	
Maximum temperature		100°C *1	
Material	Body	Cast stainless steel	
	Screen	Stainless steel	
Screen	Perforation	φ 2.5-4P	
	Mesh	Standard 80 mesh	120 to 200 mesh
Gasket		PTFE *1	
Connection		JIS Rc screwed	

• Available with 20 to 100 mesh screen (SY-17)

\*1. The material of gasket is PTFE up to 100°C.

If the temperature is more than 100°C, please contact us.

Available for temperature of strainer is more than 100°C

(Change the material of gasket)



SY-17:15-50A(Max Temp. : 250°C)

SY-37:15-40A(Max Temp. : 250°C),50A(Max Temp. : 175°C)

## ■Dimensions (mm) and Weights (kg)


Nominal size	d	L	H <sub>1</sub>	ds	∅s	Weight
15A	Rc 1/2	85	55	20 (18)	35	0.40 (0.4)
20A	Rc 3/4	100	69	25 (23)	50	0.68 (0.7)
25A	Rc 1	115	83	32 (30)	60	1.01 (1.1)
32A	Rc 1-1/4	135	92	40 (38)	70	1.48 (1.6)
40A	Rc 1-1/2	150	102	45 (43)	75	1.88 (2.0)
50A	Rc 2	180	117	56 (54)	90	3.34 (3.6)

• The above values in parentheses are the dimensions and weights of the SY-37.




### ■SY-17 Strainer Pressure Loss Chart (For Water)

- Screen: Perforation =  $\phi$  2.5-4P, Mesh = 80 mesh

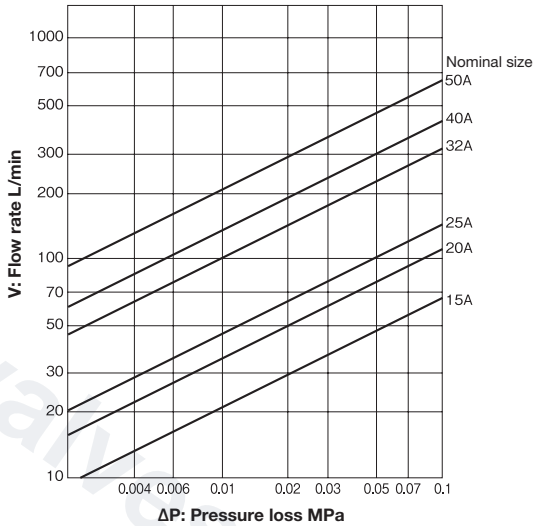

### ■SY-37 Strainer Pressure Loss Chart (For Water)

- Screen: Perforation =  $\phi$  2.5-4P, Mesh = 120 mesh

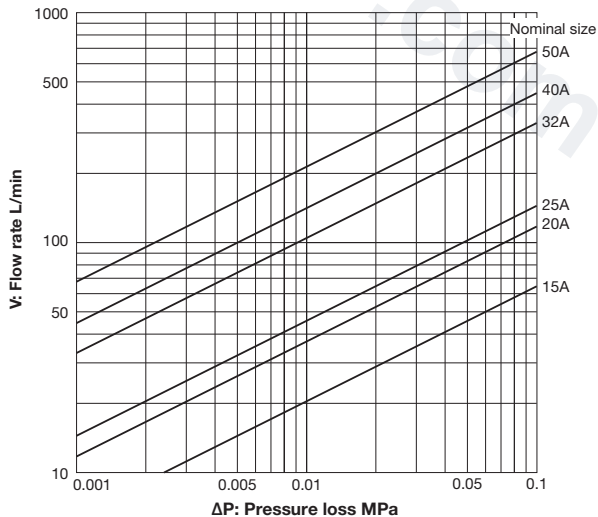

Please refer to P. 4-12 for the information about how to look the chart, and calculating example.