TEMP SENOR SIZE	"R" (IN)	"U" (IN)	PIPE SIZE (IN)
ITA	3.0	0.5	1.0-2.0
ITB	3.5	1.0	3.0-4.0
ITC	4.5	2.0	5.0-6.0
ITD	5.5	3.0	8.0-10.0
ITE	8.5	6.0	12.0-18.0
ITF	11.5	9.0	20.0 +

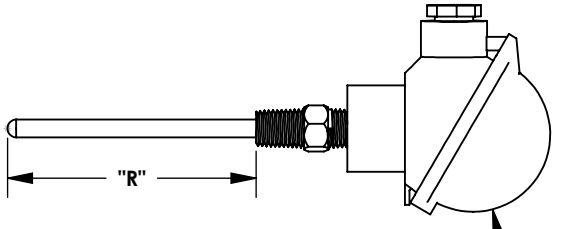

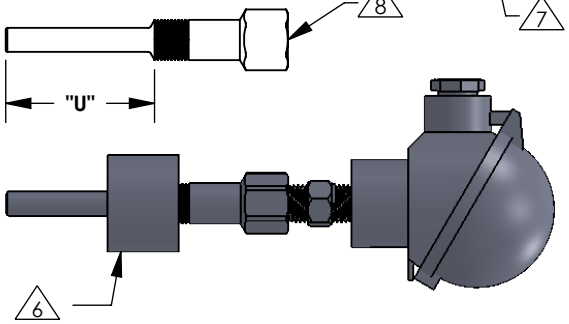

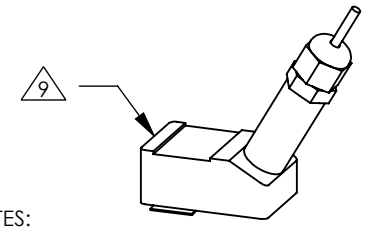

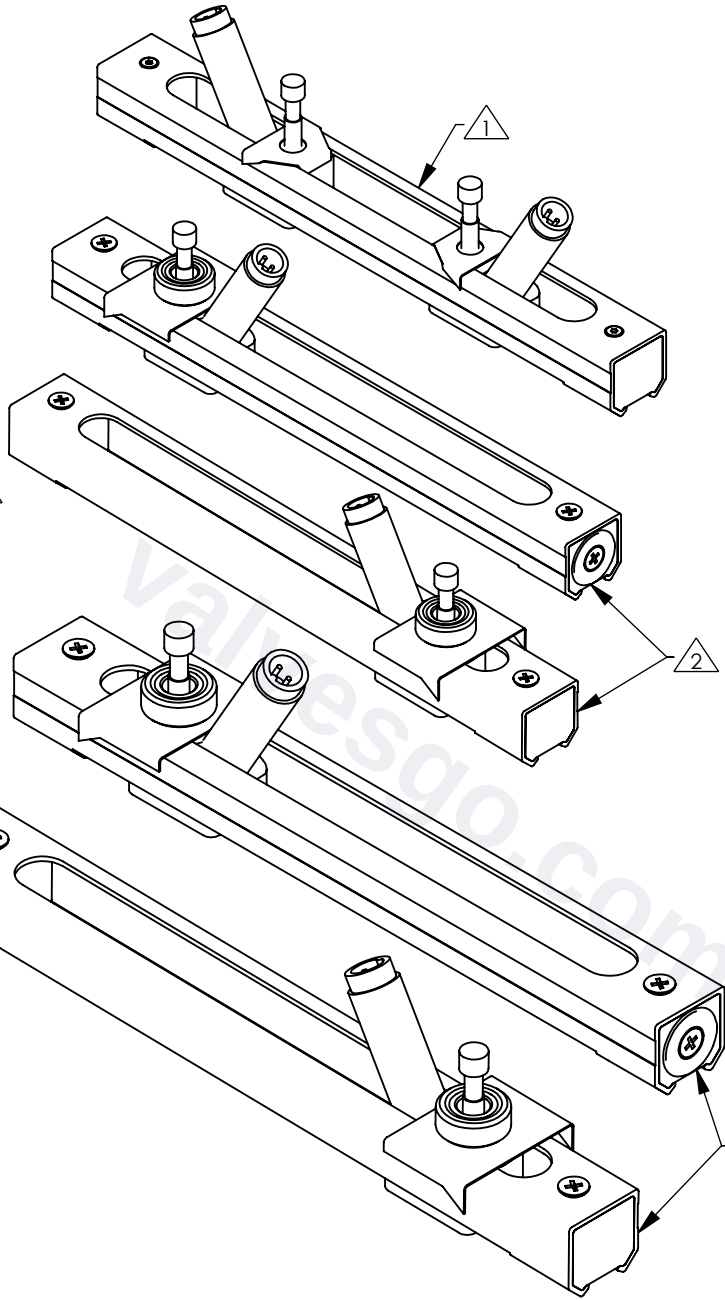

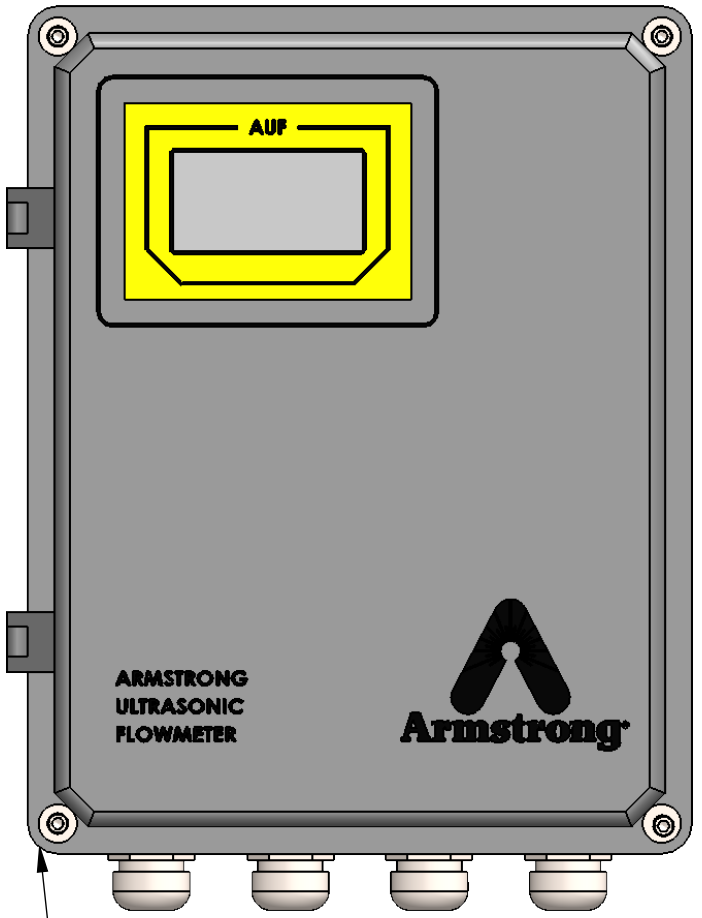

NOTES:

1. "AS" TRANSDUCER FITS PIPE SIZES 3/4"- 3".
2. "AM" TRANSDUCER FITS PIPE SIZES 3"-28".
3. "AL" TRANSDUCER FITS PIPE SIZES 28"-120"
4. ULTRASONIC FLOWMETER DISPLAY
5. BACNET ADAPTER
6. 3/4" NPT THREADOLET SUPPLIED BY CUSTOMER.
7. INSERTION RTD (3-WIRE, 1000 ohm, PLATINUM, MATCHED TO .15 DEG F)
8. 316 SS THERMOWELL
9. CLAMP ON RTD
10. TRANSDUCER CABLES INCLUDED IN ALL ORDERS (NOT SHOWN ON DRAWING).

Armstrong
VERIS Flow Measurement Group
armstronginternational.com/veris

5820 Glacier Way
Frederick, CO 80516 USA

Phone: (303) 652-8550
Fax: (303) 652-8552

ARMSTRONG
ULTRASONIC BTU FLOWMETER

DATE:	DWG. NO.
10/20/2019	AUF-BTU
SCALE: NTS	REV: A

valvesgo.com